



The 40107G-01 Radio Interface Adapter provides access for a David Clark Series 3800, 9500, 9800 or 9900 Intercom Systems or SOLO Headset Station to interface with microphone, speaker and push-to-talk (PTT) radio functions on older Motorola models without disabling the use of the radio system's hand microphone (matrix of radio models on back page.)



### FEATURES

- RFI Shielded enclosure and cables
- Recessed connector for retaining radio's hand microphone
- Two DIN connectors, for accepting up to two radio cables
- 5' Cable with Y split for
  - a) Radio hand microphone connector
  - b) External speaker leads

09227P-81 DIN Connector: Mates to radio cable connectors on 40107G-01 Radio Interface Adapter

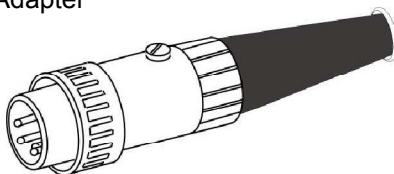

09227P-81  
Solder View

Wire Colors for C3821  
Radio Interface Cord

<u>PIN</u>	<u>FUNCTION</u>	<u>WIRE COLOR</u>
1	MIC HIGH	RED
2	SPEAKER HIGH	GREEN
3	SPKR/PTT LOW	BLACK/BLUE
4	MIC LOW	WHITE
5	PTT	YELLOW
6	CASE	SHIELD