



CAT5E CABLE




09271P-58: Industrial Ethernet cable, 200 MHz, 4 bonded pair, 24 AWG, 0.265 inch O.D., aluminum foil-polyester tape outer shield (100%), polyolefin insulation, industrial grade PVC outer jacket. Storage temp: -40° to +80°C. Install temp: -25° to +75°C. Operating temp: -40° to +75°C.

RJ-45 CONNECTORS



13199P-66: IP-68 sealed Ethernet plug (field termination kit), 24 AWG cable compatible, dual-latch mates to IP-68 sealed jack on Series 9100 network endpoints.

TURNKEY CABLES

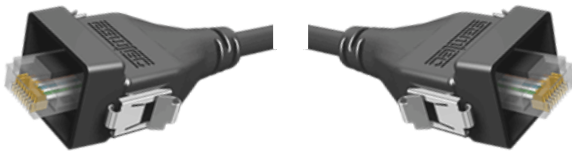

C9101: 6.5' cable assembly (2m, +/-2%), over-molded IP-68 connectors on both ends

C9102: 9.5' cable assembly (3m, +/- 2%), over-molded IP-68 connectors on both ends

C9103: 16' cable assembly (5m, +/- 2%), over-molded IP-68 connectors on both ends.

Cable construction for all is similar to 09271P-58, except conductors are 4 twisted pair (not bonded).

C91-20PW



40892G-19 Power Cable Assembly: 20 foot length, 3 pin Conxall overmolded connector on one end (IP-68 sealed), prepared leads on other end. 2 conductor individually shielded cable, 14 AWG, PVC insulation, polyurethane outer jacket, 0.312 inch O.D.

C91-20RD



40892G-20: Radio Interface Cable Assembly: 20 foot length, 6 pin JAE connector on one end (IP-68 sealed), prepared leads on other end. 6 conductor twisted pair shielded cable, 28 AWG, PVC insulation, polyurethane outer jacket, 0.188 inch O.D.

C91-20AX



40892G-21: Auxiliary Input/Output Cable Assembly: 20 foot length, 4 pin JAE connector on one end (IP-68 sealed), 3.5mm plug on other end. 4 conductor twisted pair shielded cable, 28 AWG, PVC insulation, polyurethane outer jacket, 0.188 inch O.D. 3.5mm jack to dual-RCA plug adapter cord included.

David Clark Company Incorporated
360 Franklin Street, Box 15054
Worcester, MA 01615-0054
Phone: 508-751-5800 Fax: 508-753-5827
www.davidclark.com